


maxiflex Rondo Party and Exhibition Hall

Type: 15.5/340 · Model: 417

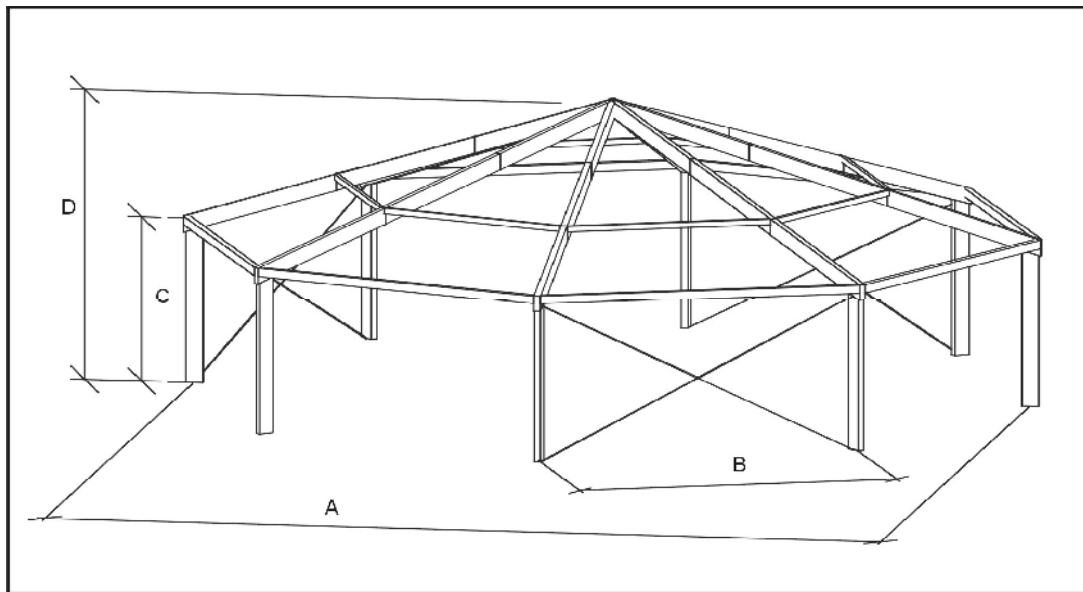

System Measures

Diameter	(A)	15.18 m
Eave height	(C)	3.26 m
Ridge height	(D)	5.72 m
Roof slope		18.00 °
Truss-distance	(B)	5.81 m
Longest component		8.06 m
Truss profile		300 x 120 mm

Technical Description

Aluminium Profiles

Solid, hard pressed
4-groove aluminium hollow profile

Steel Parts

Hot-dip galvanized according to DIN EN ISO 1461

Ground Anchoring

Ground stakes or weight anchoring upon request

Load Requirements/Technical Data

Wind load acc. to DIN 4112

Rondo consists out of 2 Apses

Subject to technical modifications!


Losberger GmbH
Fürfeld · Gottlieb-Daimler-Ring 14
74906 Bad Rappenau · Germany
Phone: +49 7066 980-0
Fax: +49 7066 980-232
E-Mail: losberger@losberger.com
www.losberger.com

Subsidiaries and Agencies Worldwide



maxiflex Rondo Party and Exhibition Hall

Type: 15.5/400 · Model: 418

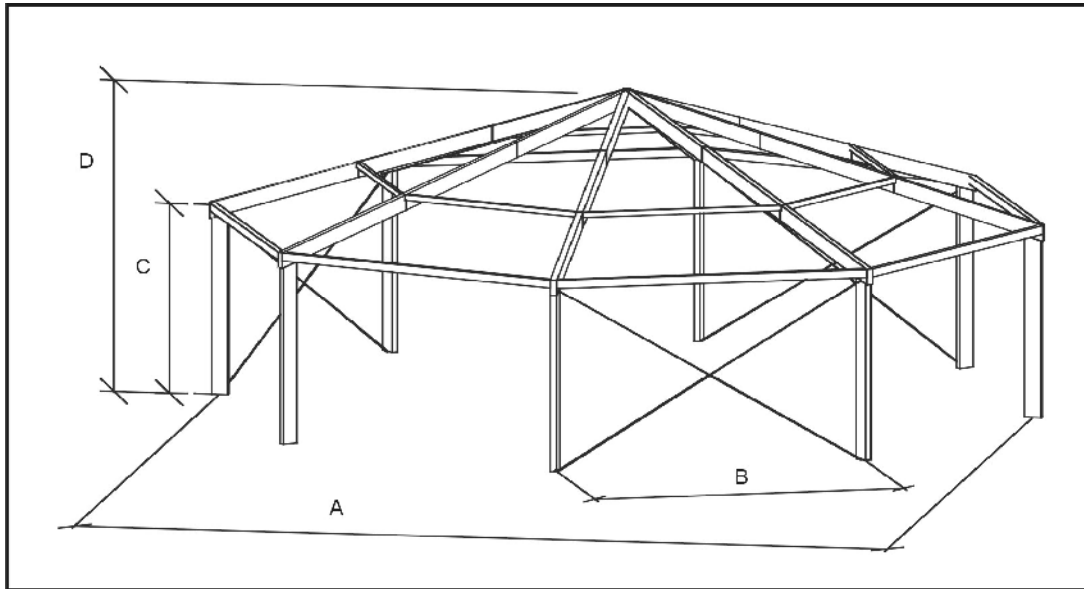

System Measures

Diameter	(A)	15.18 m
Eave height	(C)	3.86 m
Ridge height	(D)	6.32 m
Roof slope		18.00 °
Truss-distance	(B)	5.81 m
Longest component		8.06 m
Truss profile		300 x 120 mm

Technical Description

Aluminium Profiles

Solid, hard pressed
4-groove aluminium hollow profile

Steel Parts

Hot-dip galvanized according to DIN EN ISO 1461

Ground Anchoring

Ground stakes or weight anchoring upon request

Load Requirements/Technical Data

Wind load acc. to DIN 4112

Rondo consists out of 2 Apses

Subject to technical modifications!


Losberger GmbH
Fürfeld · Gottlieb-Daimler-Ring 14
74906 Bad Rappenau · Germany
Phone: +49 7066 980-0
Fax: +49 7066 980-232
E-Mail: losberger@losberger.com
www.losberger.com

Subsidiaries and Agencies Worldwide



maxiflex Rondo Party and Exhibition Hall

Type: 15.5/540 · Model: 419

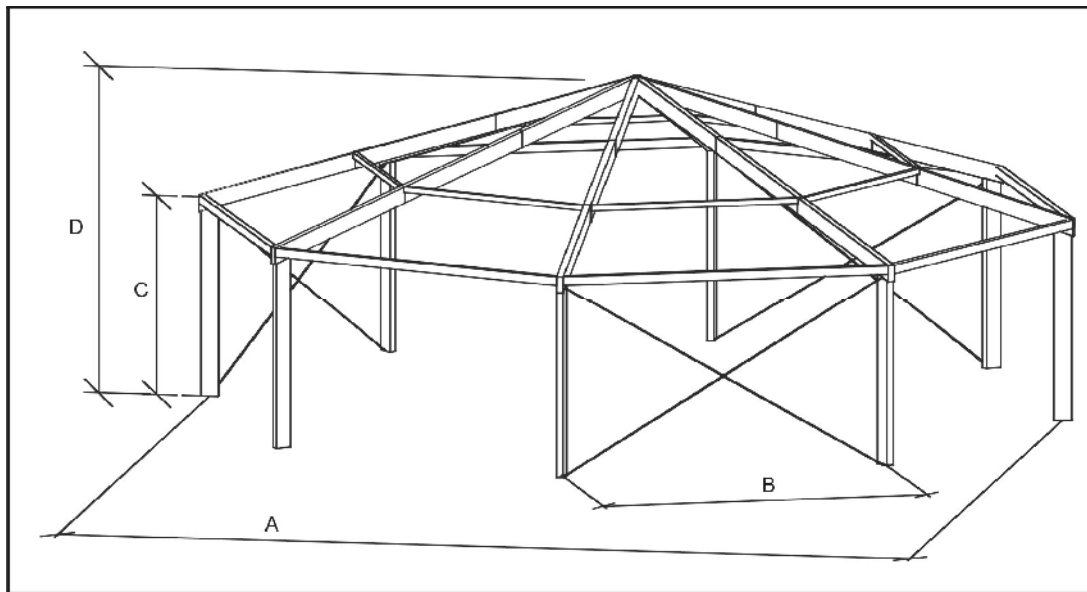

System Measures

Diameter	(A)	15.18 m
Eave height	(C)	5.26 m
Ridge height	(D)	7.72 m
Roof slope		18.00 °
Truss-distance	(B)	5.81 m
Longest component		8.06 m
Truss profile		300 x 120 mm

Technical Description

Aluminium Profiles

Solid, hard pressed
4-groove aluminium hollow profile

Steel Parts

Hot-dip galvanized according to DIN EN ISO 1461

Ground Anchoring

Ground stakes or weight anchoring upon request

Load Requirements/Technical Data

Wind load acc. to DIN 4112

Rondo consists out of 2 Apses

Subject to technical modifications!


Losberger GmbH
Fürfeld · Gottlieb-Daimler-Ring 14
74906 Bad Rappenau · Germany
Phone: +49 7066 980-0
Fax: +49 7066 980-232
E-Mail: losberger@losberger.com
www.losberger.com

Subsidiaries and Agencies Worldwide



maxiflex Rondo Party and Exhibition Hall

Type: 20.5/340 · Model: 155

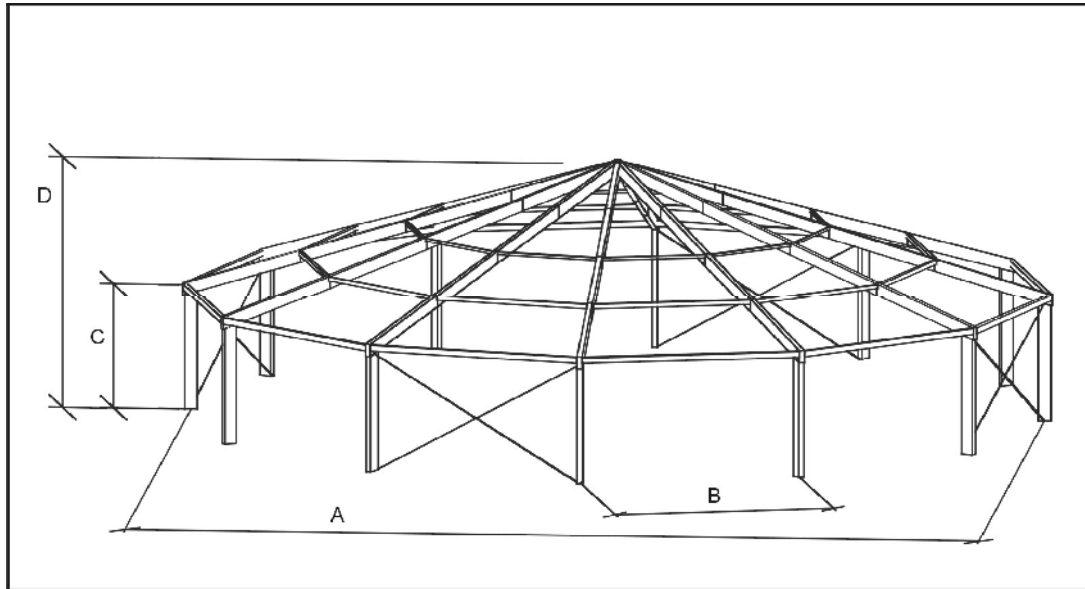

System Measures

Diameter	(A)	20.18 m
Eave height	(C)	3.26 m
Ridge height	(D)	6.53 m
Roof slope		18.00 °
Truss-distance	(B)	5.22 m
Longest component		10.61 m
Truss profile		300 x 120 mm

Technical Description

Aluminium Profiles

Solid, hard pressed
4-groove aluminium hollow profile

Steel Parts

Hot-dip galvanized according to DIN EN ISO 1461

Ground Anchoring

Ground stakes or weight anchoring upon request

Load Requirements/Technical Data

Wind load acc. to DIN 4112

Rondo consists out of 2 Apses

Subject to technical modifications!


Losberger GmbH
Fürfeld · Gottlieb-Daimler-Ring 14
74906 Bad Rappenau · Germany
Phone: +49 7066 980-0
Fax: +49 7066 980-232
E-Mail: losberger@losberger.com
www.losberger.com

Subsidiaries and Agencies Worldwide



maxiflex Rondo Party and Exhibition Hall

Type: 20.5/400 · Model: 156

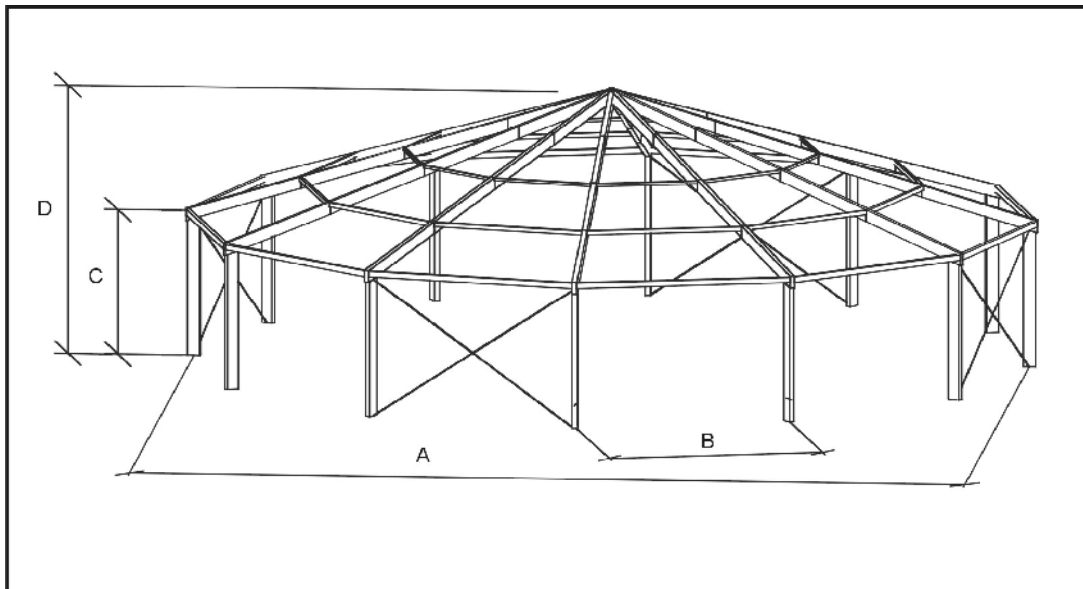

System Measures

Diameter	(A)	20.18 m
Eave height	(C)	3.86 m
Ridge height	(D)	7.14 m
Roof slope		18.00 °
Truss-distance	(B)	5.22 m
Longest component		10.61 m
Truss profile		300 x 120 mm

Technical Description

Aluminium Profiles

Solid, hard pressed
4-groove aluminium hollow profile

Steel Parts

Hot-dip galvanized according to DIN EN ISO 1461

Ground Anchoring

Ground stakes or weight anchoring upon request

Load Requirements/Technical Data

Wind load acc. to DIN 4112

Rondo consists out of 2 Apses

Subject to technical modifications!


Losberger GmbH
Fürfeld · Gottlieb-Daimler-Ring 14
74906 Bad Rappenau · Germany
Phone: +49 7066 980-0
Fax: +49 7066 980-232
E-Mail: losberger@losberger.com
www.losberger.com

Subsidiaries and Agencies Worldwide



maxiflex Rondo Party and Exhibition Hall

Type: 20.5/540 · Model: 157

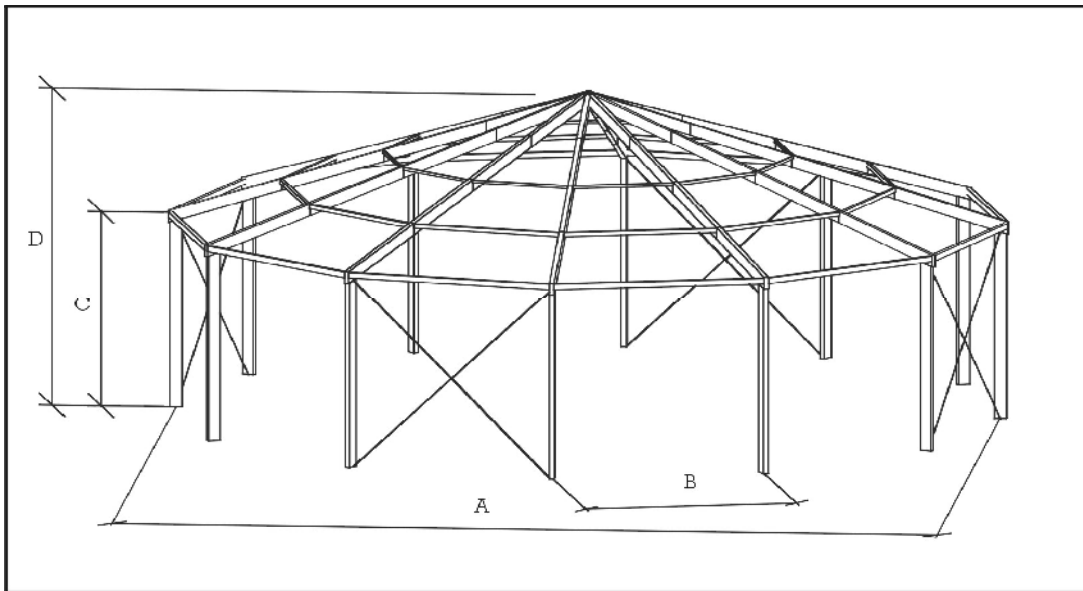

System Measures

Diameter	(A)	20.18 m
Eave height	(C)	5.26 m
Ridge height	(D)	8.53 m
Roof slope		18.00 °
Truss-distance	(B)	5.22 m
Longest component		10.61 m
Truss profile		300 x 120 mm

Technical Description

Aluminium Profiles

Solid, hard pressed
4-groove aluminium hollow profile

Steel Parts

Hot-dip galvanized according to DIN EN ISO 1461

Ground Anchoring

Ground stakes or weight anchoring upon request

Load Requirements/Technical Data

Wind load acc. to DIN 4112

Rondo consists out of 2 Apses

Subject to technical modifications!


Losberger GmbH
Fürfeld · Gottlieb-Daimler-Ring 14
74906 Bad Rappenau · Germany
Phone: +49 7066 980-0
Fax: +49 7066 980-232
E-Mail: losberger@losberger.com
www.losberger.com

Subsidiaries and Agencies Worldwide



maxiflex Rondo Party and Exhibition Hall

Type: 25.5/340 · Model: 414

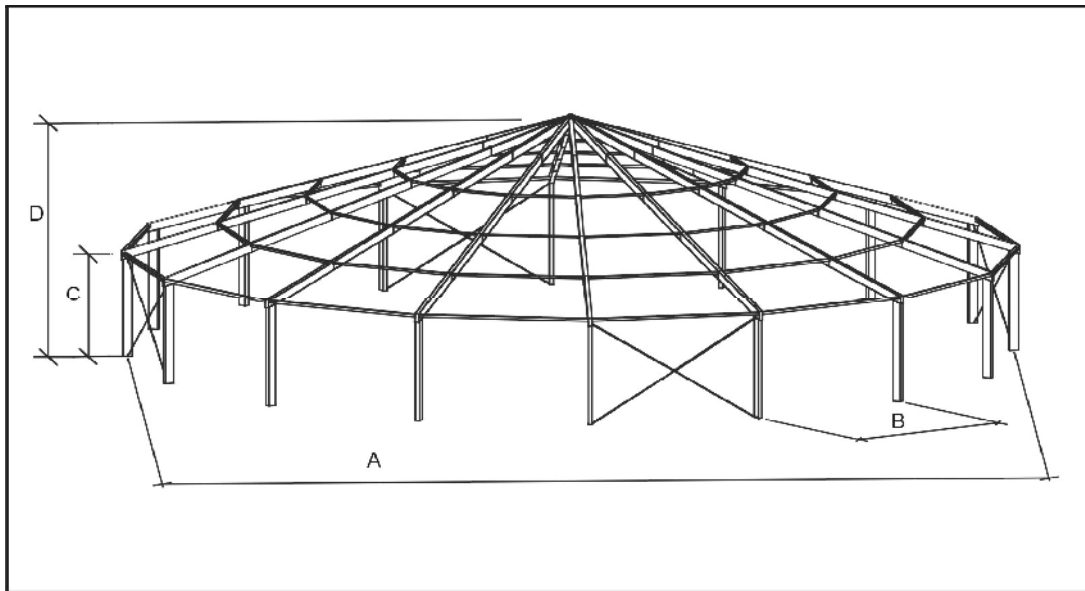

System Measures

Diameter	(A)	25.18 m
Eave height	(C)	3.26 m
Ridge height	(D)	7.35 m
Roof slope		18.00 °
Truss-distance	(B)	4.91 m
Longest component		10.61 m
Truss profile		300 x 120 mm

Technical Description

Aluminium Profiles

Solid, hard pressed
4-groove aluminium hollow profile

Steel Parts

Hot-dip galvanized according to DIN EN ISO 1461

Ground Anchoring

Ground stakes or weight anchoring upon request

Load Requirements/Technical Data

Wind load acc. to DIN 4112

Rondo consists out of 2 Apses

Subject to technical modifications!


Losberger GmbH
Fürfeld · Gottlieb-Daimler-Ring 14
74906 Bad Rappenau · Germany
Phone: +49 7066 980-0
Fax: +49 7066 980-232
E-Mail: losberger@losberger.com
www.losberger.com

Subsidiaries and Agencies Worldwide



maxiflex Rondo Party and Exhibition Hall

Type: 25.5/400 · Model: 415

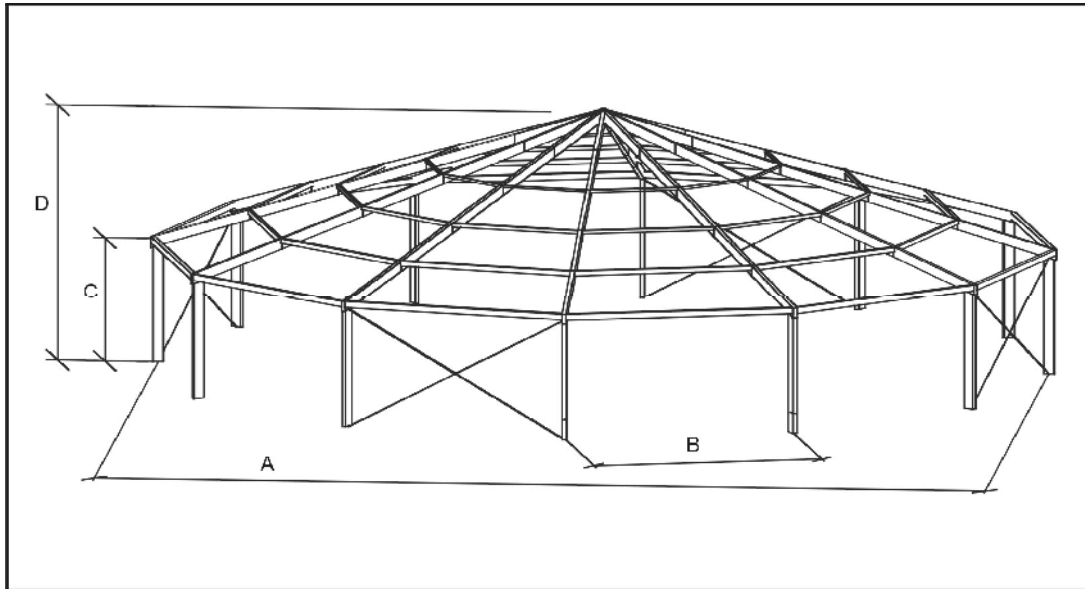

System Measures

Diameter	(A)	25.18 m
Eave height	(C)	3.86 m
Ridge height	(D)	7.95 m
Roof slope		18.00 °
Truss-distance	(B)	4.91 m
Longest component		10.61 m
Truss profile		300 x 120 mm

Technical Description

Aluminium Profiles

Solid, hard pressed
4-groove aluminium hollow profile

Steel Parts

Hot-dip galvanized according to DIN EN ISO 1461

Ground Anchoring

Ground stakes or weight anchoring upon request

Load Requirements/Technical Data

Wind load acc. to DIN 4112

Rondo consists out of 2 Apses

Subject to technical modifications!


Losberger GmbH
Fürfeld · Gottlieb-Daimler-Ring 14
74906 Bad Rappenau · Germany
Phone: +49 7066 980-0
Fax: +49 7066 980-232
E-Mail: losberger@losberger.com
www.losberger.com

Subsidiaries and Agencies Worldwide



maxiflex Rondo Party and Exhibition Hall

Type: 25.5/540 · Model: XXX

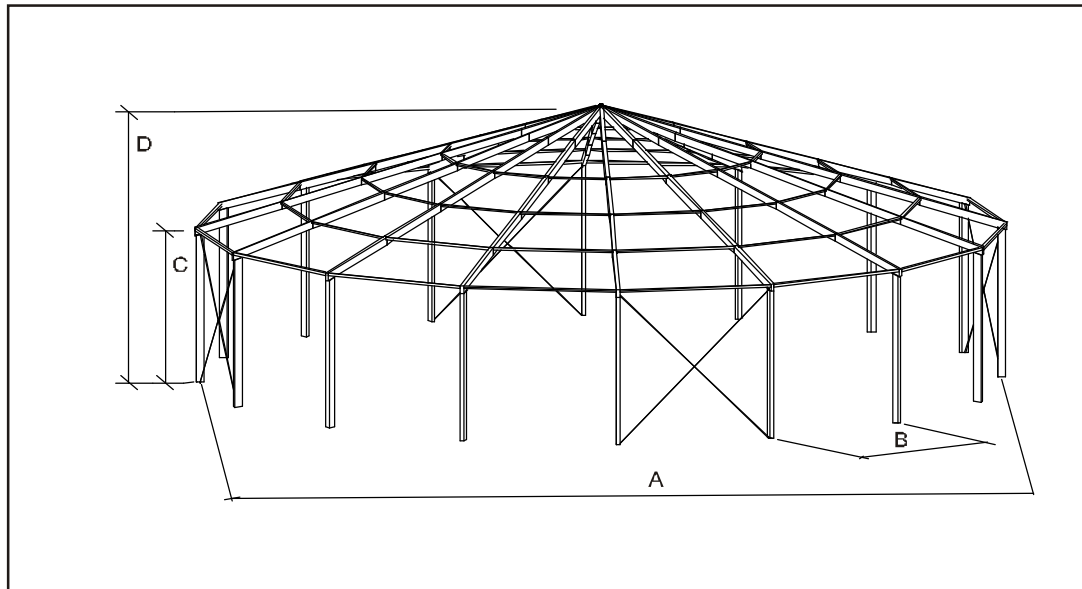

System Measures

Diameter	(A)	25.18 m
Eave height	(C)	5.26 m
Ridge height	(D)	9.35 m
Roof slope		18.00 °
Truss-distance	(B)	4.91 m
Longest component		10.61 m
Truss profile		300 x 120 mm

Technical Description

Aluminium Profiles

Solid, hard pressed
4-groove aluminium hollow profile

Steel Parts

Hot-dip galvanized according to DIN EN ISO 1461

Ground Anchoring

Ground stakes or weight anchoring upon request

Load Requirements/Technical Data

Wind load acc. to DIN 4112

Rondo consists out of 2 Apses

Subject to technical modifications!


Losberger GmbH
Fürfeld · Gottlieb-Daimler-Ring 14
74906 Bad Rappenau · Germany
Phone: +49 7066 980-0
Fax: +49 7066 980-232
E-Mail: losberger@losberger.com
www.losberger.com

Subsidiaries and Agencies Worldwide



maxiflex Rondo Party and Exhibition Hall

Type: 30.5/340 · Model: 413

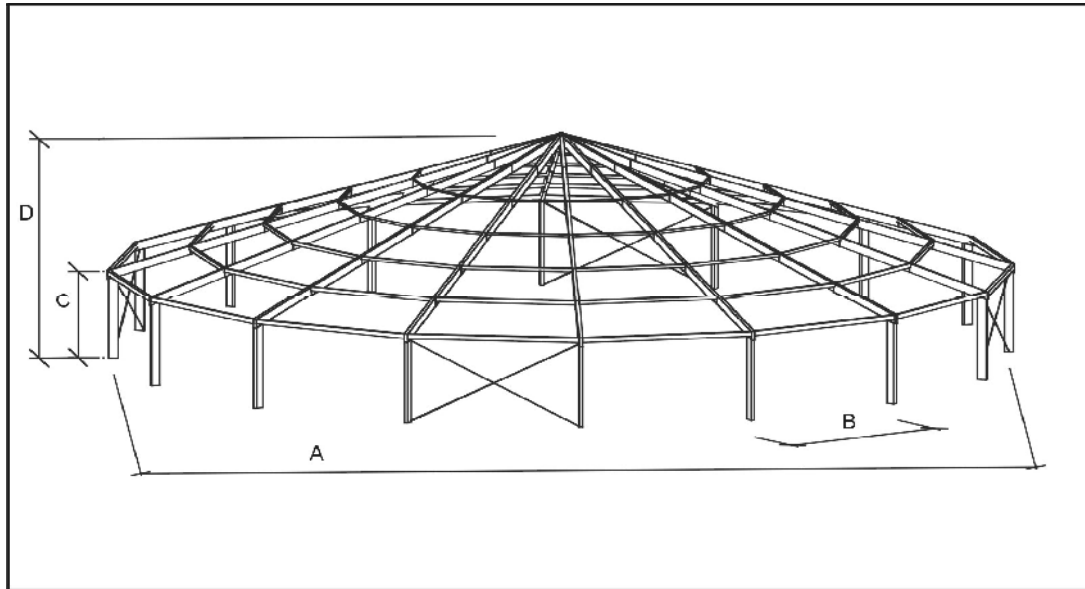

System Measures

Diameter	(A)	30.18 m
Eave height	(C)	3.26 m
Ridge height	(D)	8.16 m
Roof slope		18.00 °
Truss-distance	(B)	5.88 m
Longest component		10.61 m
Truss profile		300 x 120 mm

Technical Description

Aluminium Profiles

Solid, hard pressed
4-groove aluminium hollow profile

Steel Parts

Hot-dip galvanized according to DIN EN ISO 1461

Ground Anchoring

Ground stakes or weight anchoring upon request

Load Requirements/Technical Data

Wind load acc. to DIN 4112

Rondo consists out of 2 Apses

Subject to technical modifications!


Losberger GmbH
Fürfeld · Gottlieb-Daimler-Ring 14
74906 Bad Rappenau · Germany
Phone: +49 7066 980-0
Fax: +49 7066 980-232
E-Mail: losberger@losberger.com
www.losberger.com

Subsidiaries and Agencies Worldwide



maxiflex Rondo Party and Exhibition Hall

Type: 30.5/400 · Model: 369

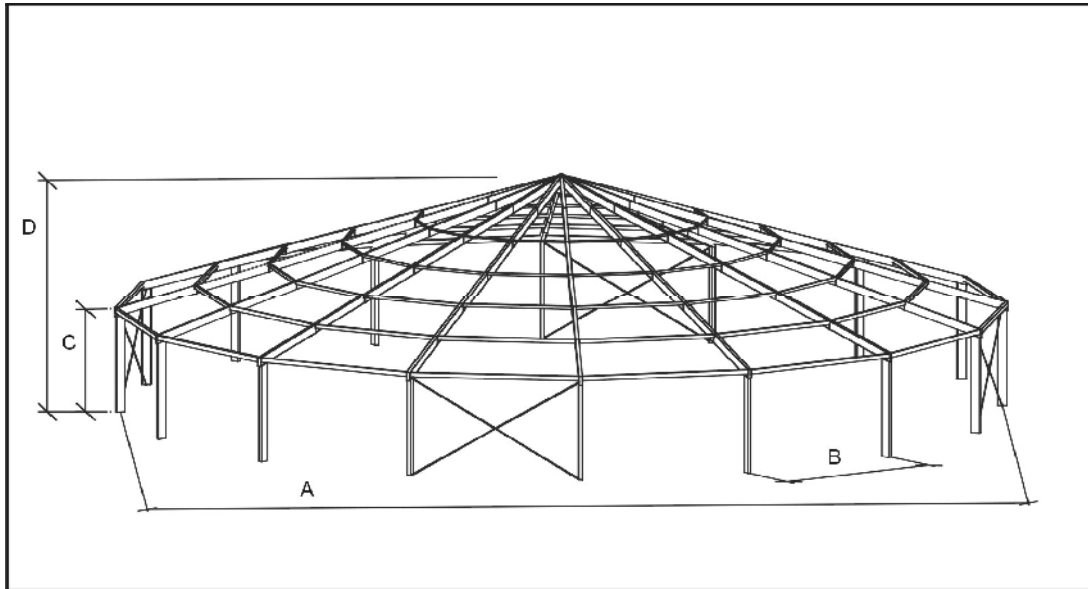

System Measures

Diameter	(A)	30.18 m
Eave height	(C)	3.86 m
Ridge height	(D)	8.76 m
Roof slope		18.00 °
Truss-distance	(B)	5.88 m
Longest component		10.61 m
Truss profile		300 x 120 mm

Technical Description

Aluminium Profiles

Solid, hard pressed
4-groove aluminium hollow profile

Steel Parts

Hot-dip galvanized according to DIN EN ISO 1461

Ground Anchoring

Ground stakes or weight anchoring upon request

Load Requirements/Technical Data

Wind load acc. to DIN 4112

Rondo consists out of 2 Apses

Subject to technical modifications!


Losberger GmbH
Fürfeld · Gottlieb-Daimler-Ring 14
74906 Bad Rappenau · Germany
Phone: +49 7066 980-0
Fax: +49 7066 980-232
E-Mail: losberger@losberger.com
www.losberger.com

Subsidiaries and Agencies Worldwide



maxiflex Rondo Party and Exhibition Hall

Type: 30.5/540 · Model: XXX

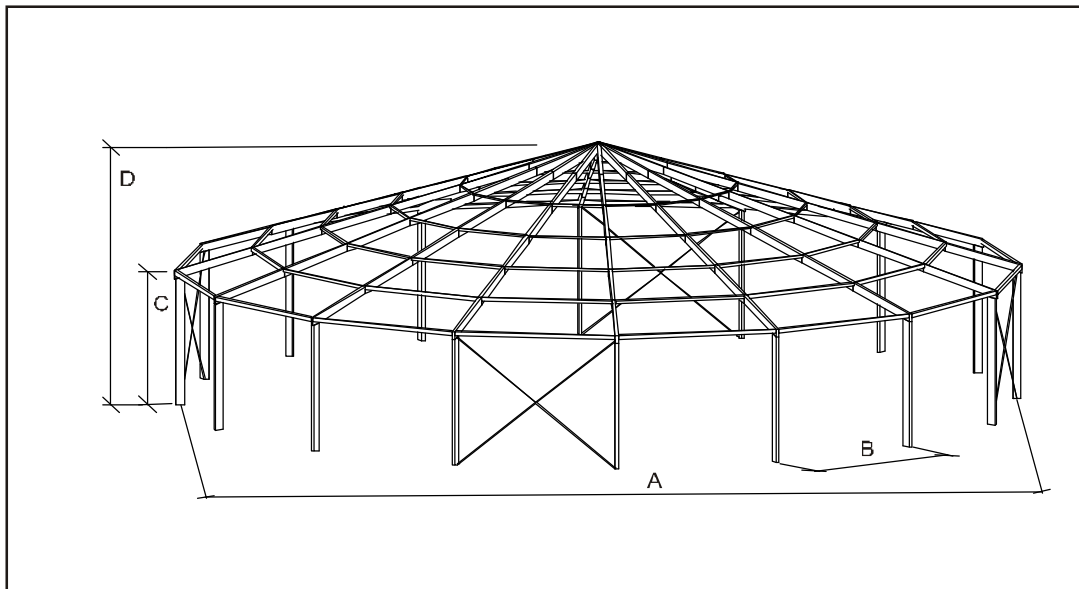

System Measures

Diameter	(A)	30.18 m
Eave height	(C)	5.26 m
Ridge height	(D)	10.16 m
Roof slope		18.00 °
Truss-distance	(B)	5.88 m
Longest component		10.61 m
Truss profile		300 x 120 mm

Technical Description

Aluminium Profiles

Solid, hard pressed
4-groove aluminium hollow profile

Steel Parts

Hot-dip galvanized according to DIN EN ISO 1461

Ground Anchoring

Ground stakes or weight anchoring upon request

Load Requirements/Technical Data

Wind load acc. to DIN 4112

Rondo consists out of 2 Apses

Subject to technical modifications!

Losberger GmbH
Fürfeld · Gottlieb-Daimler-Ring 14
74906 Bad Rappenau · Germany
Phone: +49 7066 980-0
Fax: +49 7066 980-232
E-Mail: losberger@losberger.com
www.losberger.com

Subsidiaries and Agencies Worldwide

